

Rack

Assembly Instructions



Torx T25 Wrench &

Torque Wrench



20 minutes

www.tailfin.cc support@tailfin.cc for further assistance



Rack

What's included

- 1 Arch
- 2 Top Stay
- 3 Long Seat Post Strap
- 4 Axle*
- 5 Fast Release Dropouts*



^{*} For 'Axle + Fast Release Dropout' option If Direct Mounting <u>click here</u>

Orientate Arch and Fast Release Dropouts

Step One

- (A) Use the Tailfin logo to orientate the Arch.
- (B) The logo is legible when stood behind the bike. This will ensure panniers are also at the correct angle

(A)

- C Place Dropout on Arch. The sloped side of the dropout faces outside
- D The quick release pin faces backwards









^{*}Not applicable to Direct Mount setup, proceed to Step 3

Attach Fast Release Dropouts

Step Two

A Attach Dropouts to the Arch using the countersunk screws included.

Tighten screws in turn to 5Nm



Attach Top Stay

Step Three

- A Rotate retaining clips so they are pointing vertically
- B Attach one side of the Top Stay to Arch. Repeat for the opposite side. *WARNING* Do not overly flex the Top Stay, This can cause a fracture
- C Push both arms of the Top Stay fully onto the Arch
- Now attach the retaining clips on both sides of the Top Stay.

Check the retaining clip is fully seated in the groove all the way around



Attach Rack to Bike

Step Five

- A Open Fast Release Dropouts
- B Clamp Dropouts in place around Axle/Frame Mount Adaptors
- C Close Seat Post Connector in place




Warning

Step Six

- A Ensure 'teeth' of the Seat Post Connector are closed by pushing on the lever.
- Clamp is locked, ready to ride

- B DO NOT use the release button to attach the Rack.
- Clamp is unlocked, do not ride

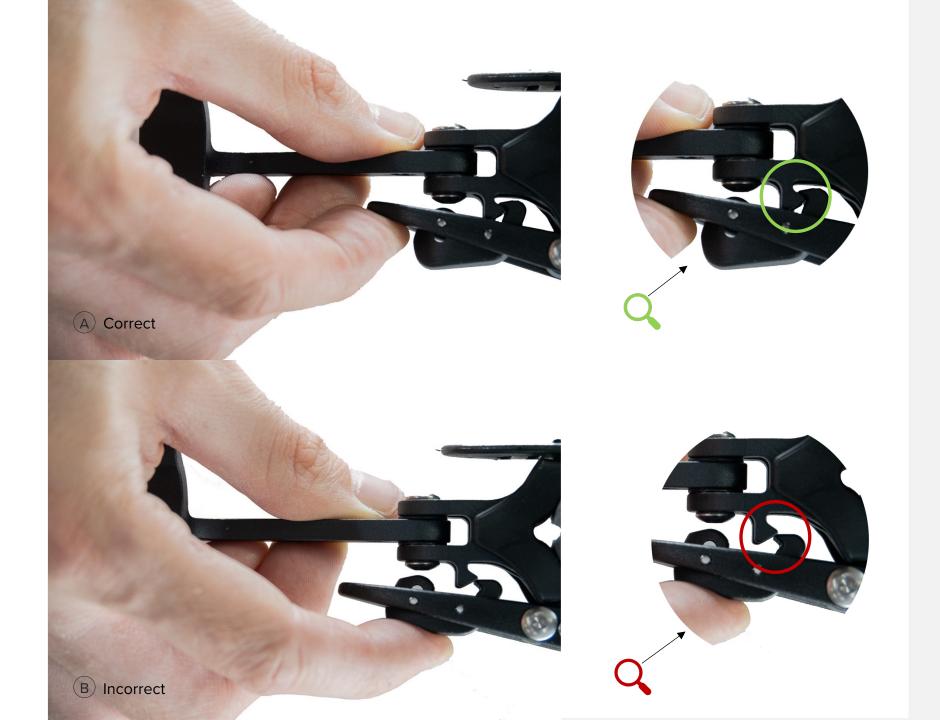


Anti-Theft Screws

Optional Step

- A Security Torx key and screws are included with each set of Fast Release Dropouts
- B Install the screws to lock the Fast Release Dropouts to your axle



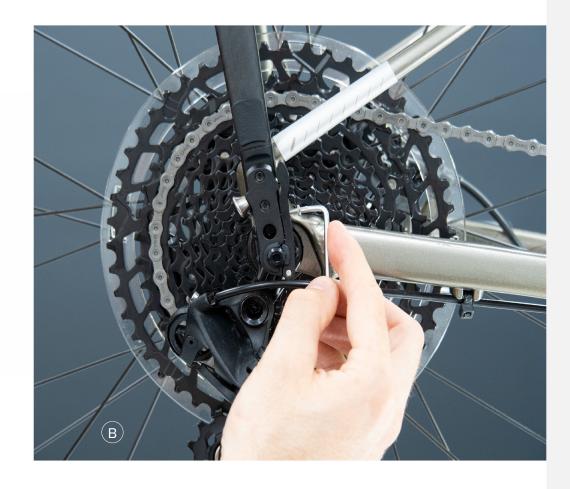



Rack

Assembly Instructions

www.tailfin.cc support@tailfin.cc for further assistance