




Flip Top Tube Pack with MagLock Assembly Instructions

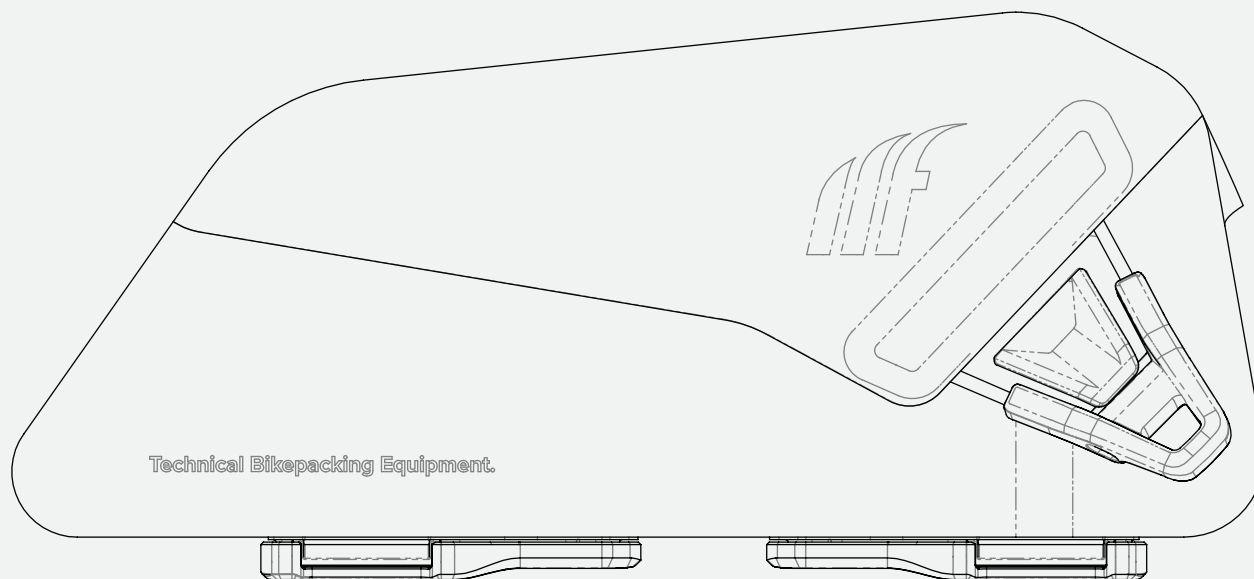

What's included





- A** Flip Top Tube Pack
- B** 2x 18.5cm Cargo Strap + Keeper
- C** 1x 36cm Cargo Strap + Keeper
- D** 2x M5x18mm T25 Torx Mounting Screws + Washers

Tools Required

T25 Torx Screwdriver (direct mount only)

Time


5 Minutes

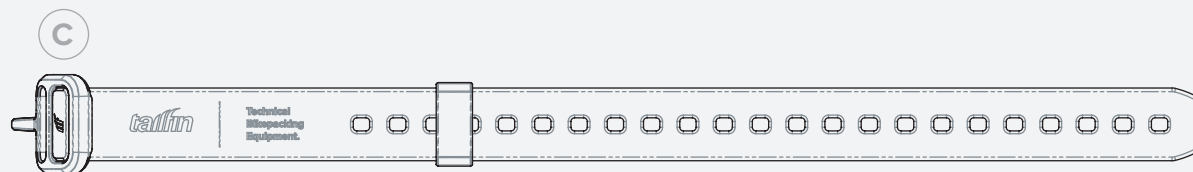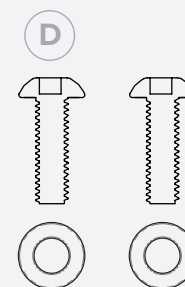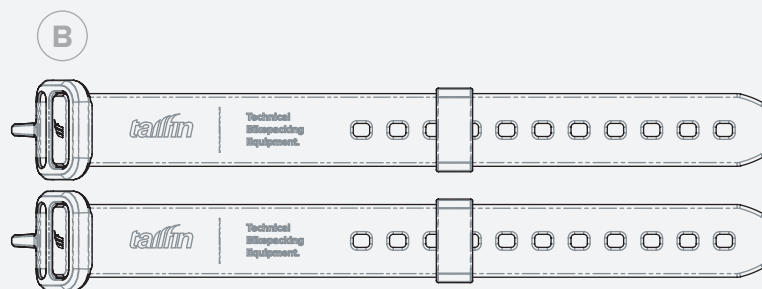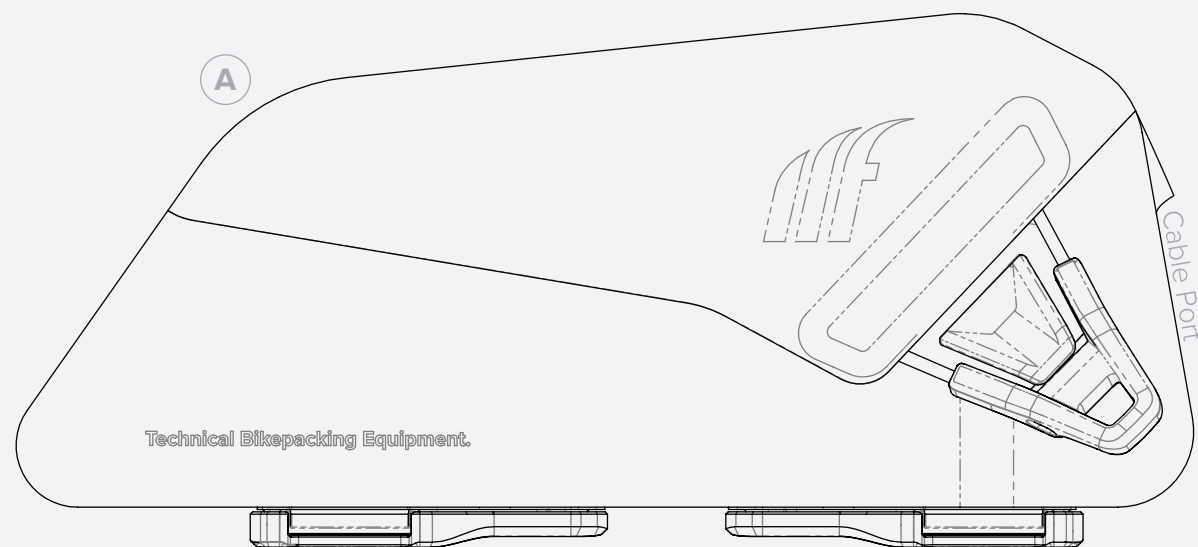

Strap Mount

Option One


- A** Pass strap through V-Mount, thread hook and pull tight to engage hook. Pulling hard on the strap will minimise any movement and prevent wear.
- B** Push loose end of strap back through the V-Mount. You may need to adjust hook position for a neat finish. You can also use the strap keeper.

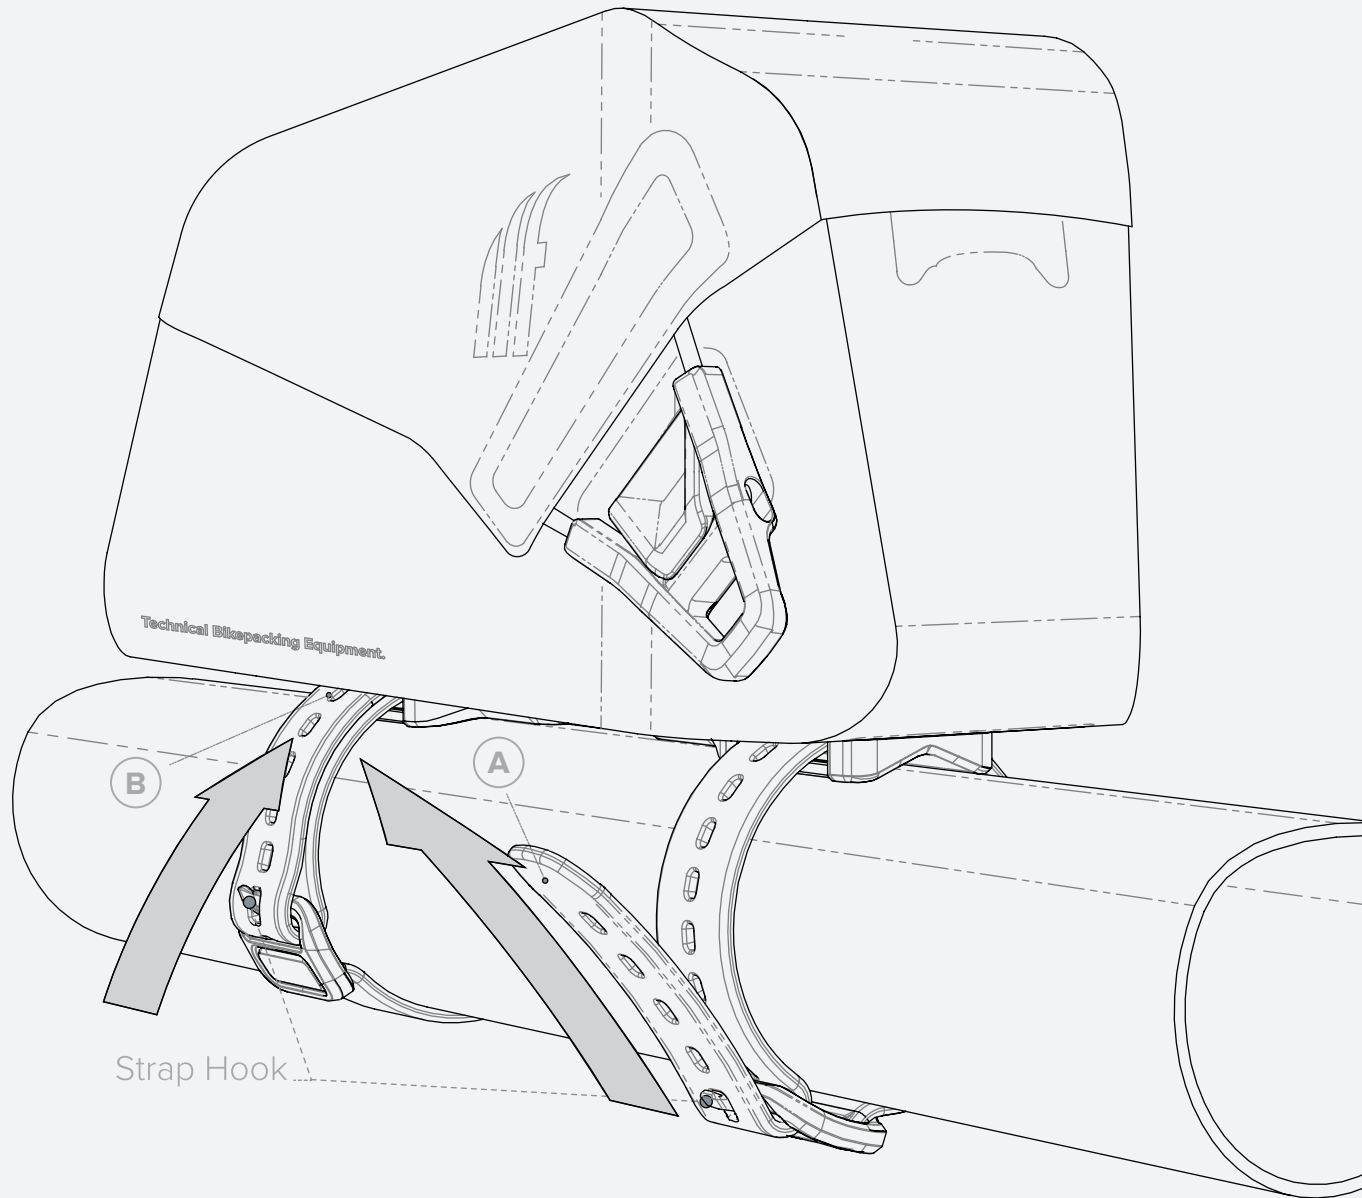

Direct Mounting

Option Two


If your bike has direct mount screw bosses the Top Tube Bags can be screwed into place. There are two mounting positions provided to place your top tube bag close to your steerer tube (19mm apart). Remove internal foam insole and push M5x16mm screw through cross cut in V-Mount rubber cover at the desired position.

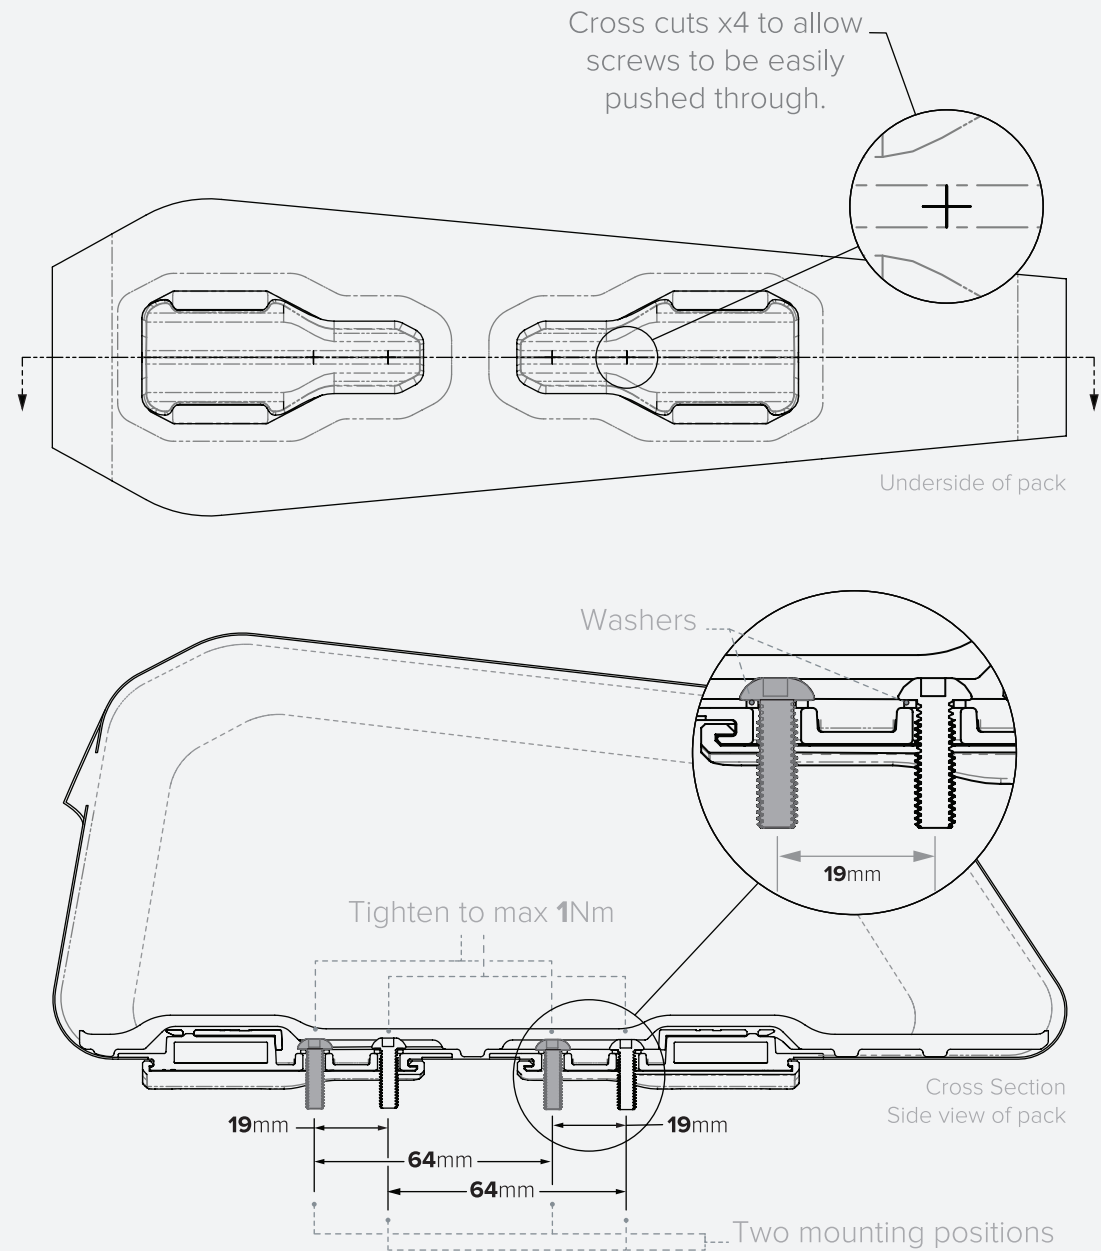

When Space is Tight

Top Tips


On small tube diameter bikes (steel) or when fitting with a frame bag you may need to tighten straps with Top Tube Bag off to one side. Once tight Top the Tube Pack can be pushed back to vertical.

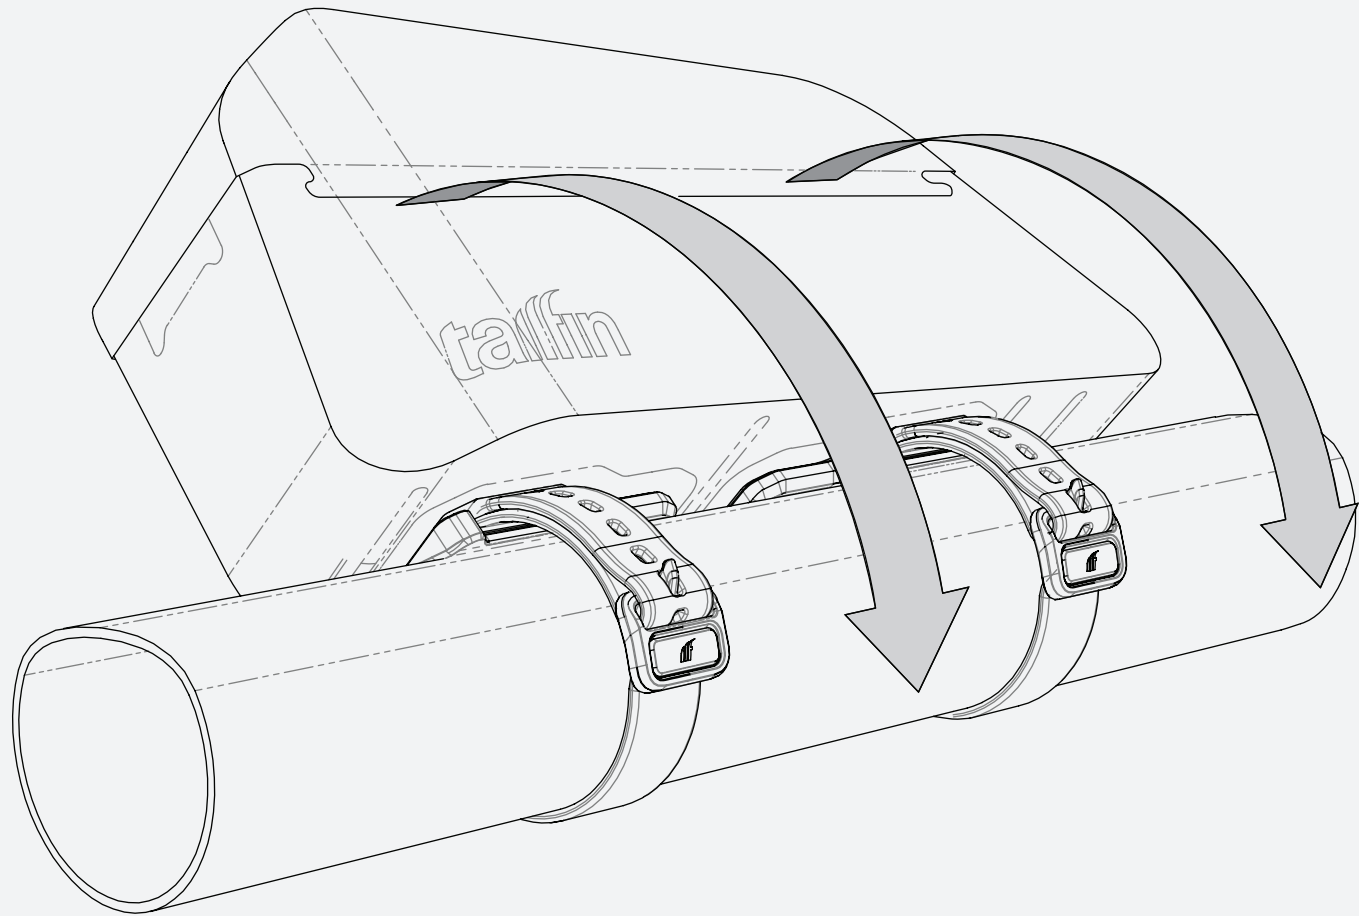

Mounting to Thicker Frames


Top Tips

Two straps can be joined together using the keeper to make one longer strap for bikes with thick downtube to headtube unions.

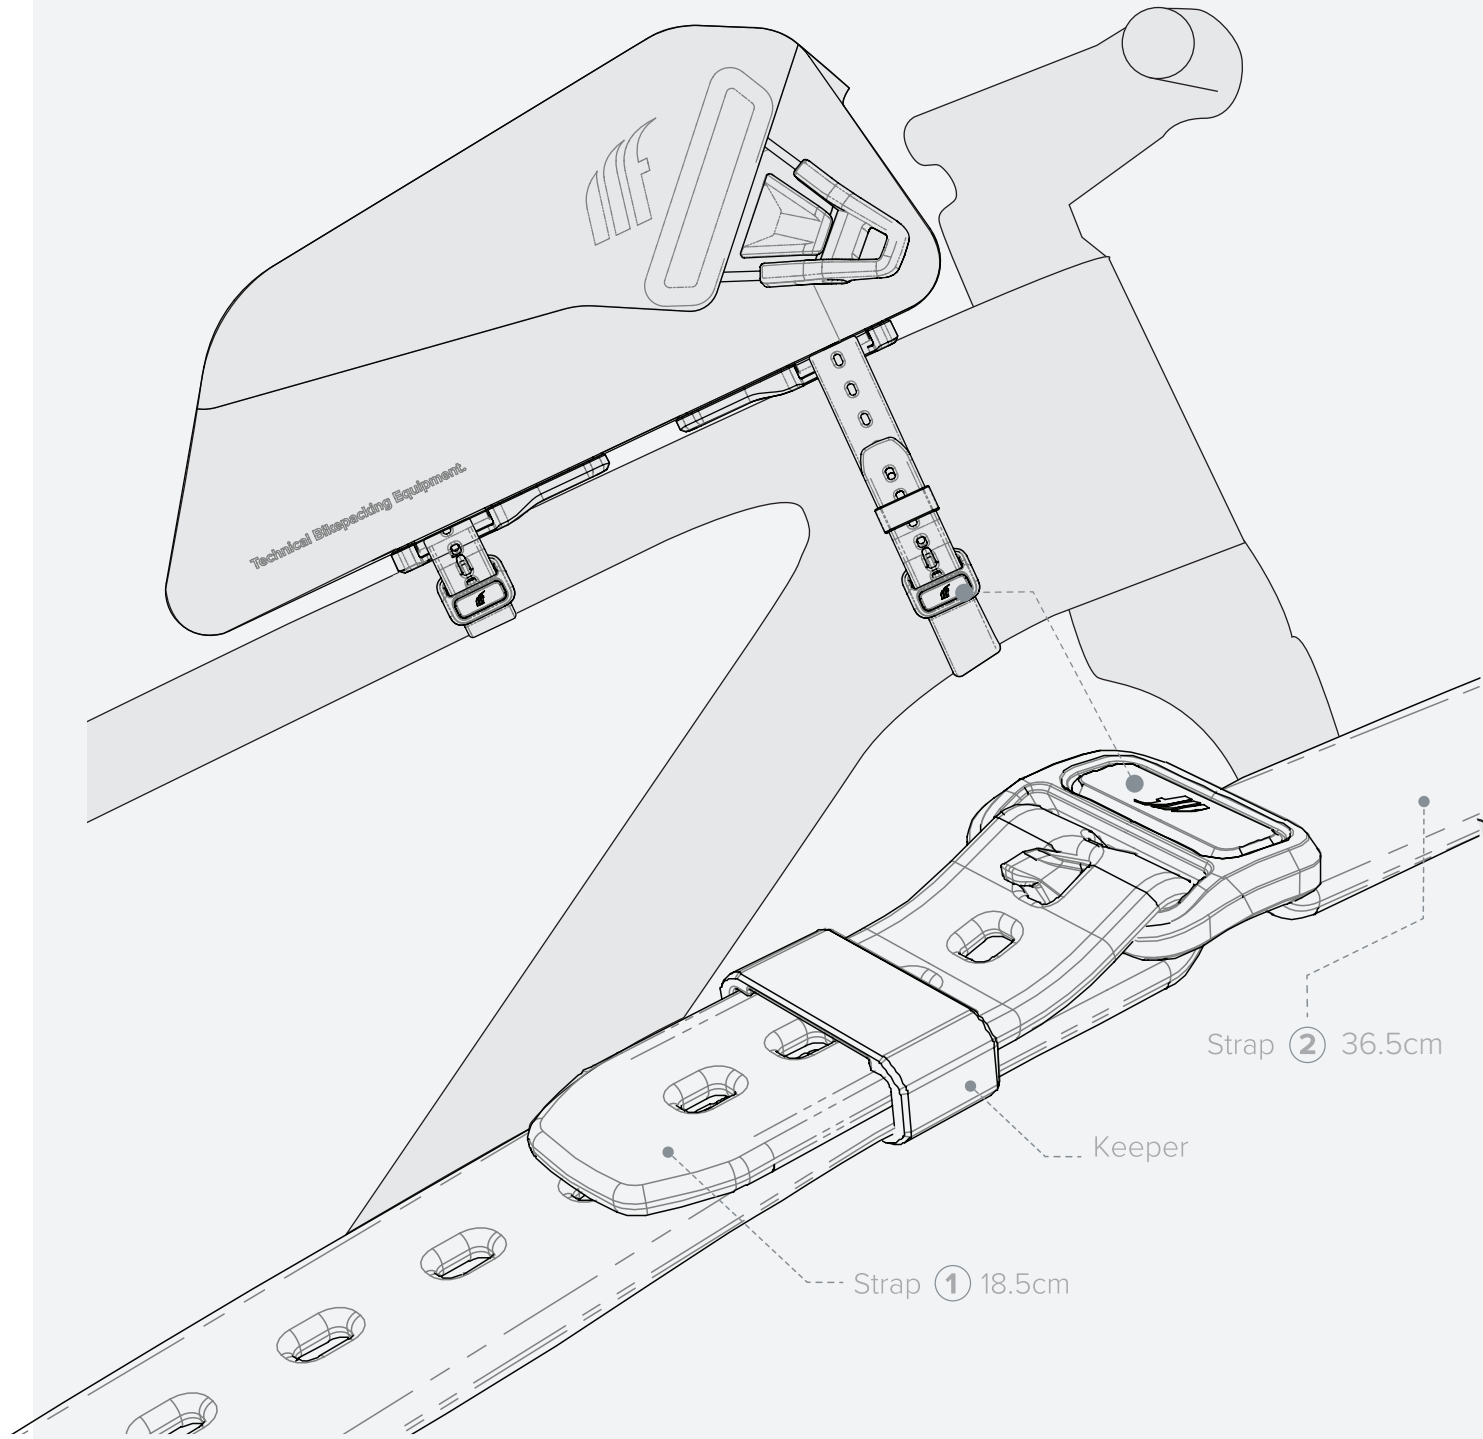

How to use MagLock

Top Tips

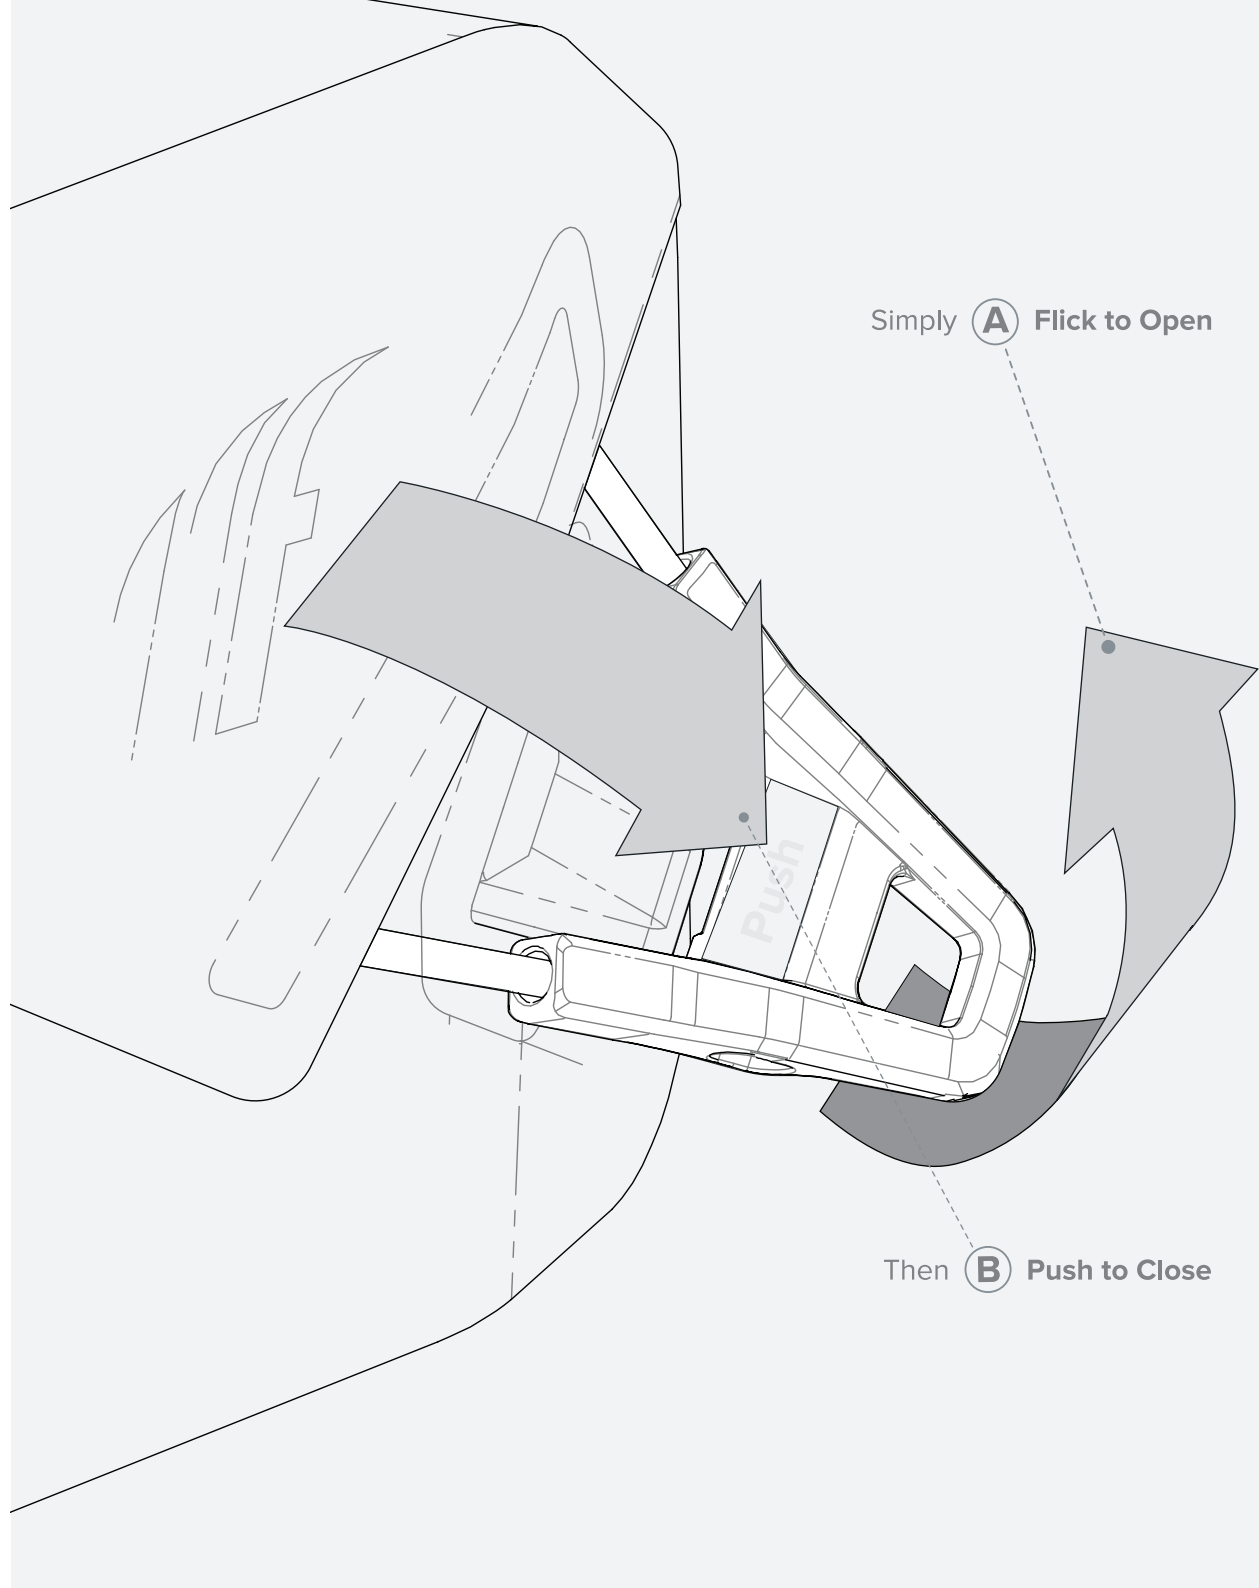



Top Tube Pack With MagLock
Assembly Instructions

Technical Bikepacking Equipment.

www.tailfin.cc

support@tailfin.cc

for further assistance